




HP Latex 800 W Printer

Win high-value jobs with white ink and productive printing—and sharpen your sustainability edge

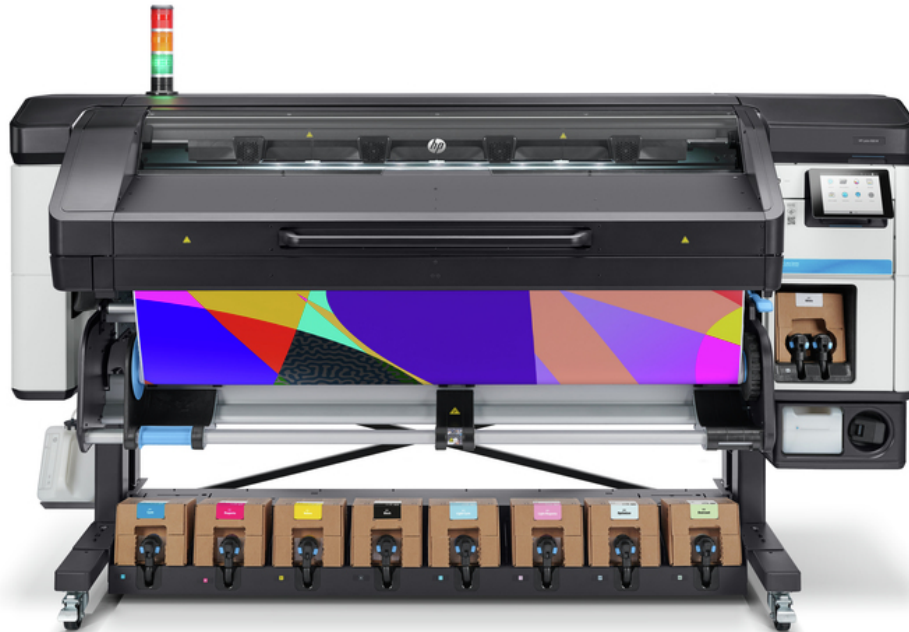

Expand into white, produce the highest value jobs

- Extend your portfolio into high-margin stickers and window graphics with the whitest white.¹
- Print white with complexity—automatic recirculation and printhead cleaning reduce manual purging.
- Deliver vivid colors at high speed, get striking contrast using pure blacks, and expect sharp 4-point text.
- Choose from a wide application range covering banners/textiles/poster paper, canvas, wallpaper, and vinyl.

Robust, smart, and productive printing

- Drive high productivity with saturated color at speeds up to 388 ft²/hr outdoor², easy spindle-less loading.
- Control print operations virtually anytime, anywhere with HP PrintOS tools, and grow with HP Learn trainings.
- Work fast processing reprints and multi-copy jobs with a smart front panel, and store up to 100 jobs.
- Help reduce running costs with cost-effective 3-liter HP ink cartridges, changed while the printer runs.

Sharpen your sustainability edge with HP Latex

- Innovative water-based HP Latex Inks—no HAPs³, no required hazard warning labels, and odorless prints.⁴
- Local HP Eco-Carton outer carton recycling.⁵
- Choose from a wide range of compatible eco-conscious media.⁶
- HP Latex prints are recyclable, returnable, or non-hazardous and safe for disposal.⁷

For more information, please visit <http://www.hp.com/go/latex800series>

Join the community, find tools, and talk to experts. Visit the HP Latex Knowledge Center at <https://hplatexknowledgecenter.com/>

Dynamic security enabled printer. Only intended to be used with cartridges using an HP original chip. Cartridges using a non-HP chip may not work, and those that work today may not work in the future. More at: <http://www.hp.com/go/learnaboutsupplies>

¹ Whitest white based on ISO/DIS 23498 compared to competitive alternatives using solvent and UV technologies under \$50,000 USD as of May, 2020. Test performed on black opaque self-adhesive vinyl (L*:4.16 – a:0.48-b:2.34) with 160% UF printmode using HP 873 3-liter White Latex Ink Cartridge. Visual opacity = 91%.
² Outdoor mode (Banner) 4-pass, 100%. Based on internal HP testing in September 2020 on Avery 3001. Print speed may vary due to the adaptive printing mechanism to avoid image quality defects.
³ HP Latex Inks were tested for Hazardous Air Pollutants, as defined in the Clean Air Act, per U.S. Environmental Protection Agency Method 311 (testing conducted in 2013) and none were detected.
⁴ There is a broad set of media with very different odor profiles. Some of the media can affect the odor performance of the final print.
⁵ The ink cartridge outer carton is 100% recyclable through local cardboard/paper programs.
⁶ See <http://www.hp.com/go/mediasolutionslocator>.
⁷ Most HP large format paper-based printing materials can be recycled through commonly available recycling programs, or according to region-specific practices. Some HP media are eligible for return through the free, convenient HP Large Format Media take-back program. Programs may not exist in your area. See <http://www.HPLFMedia.com/hp/ecosolutions> for details. HP large format printing materials, both unprinted and printed with Original HP Latex Inks, are non-hazardous and safe for disposal. Contact your local waste management authority for local area-specific instructions.

Technical specifications

Print

Printing modes	1313 ft ² /hr - Max Speed (1-pass) 388 ft ² /hr - High Speed (4-pass) 269 ft ² /hr - Production Fast (6-pass) 215 ft ² /hr - Production Quality, Textiles and Backlits (8-pass) 183 ft ² /hr - High Saturation (12-pass) 151 ft ² /hr - High Saturation Backlits and Textiles (14-pass) 183 ft ² /hr - White Spot (60%) 99 ft ² /hr - White Overflood (60%) 32 ft ² /hr - White Underflood (100%) 22 ft ² /hr - 3 Layers Day & Night (160%) ¹
----------------	---

Print resolution	Up to 1200 x 1200 dpi
Ink types	Water-based HP Latex Inks
Ink cartridges	9 (black, cyan, light cyan, light magenta, magenta, yellow, white, HP Latex Optimizer, HP Overcoat)
Cartridge size	3 L
Printheads	10 (2 cyan/black, 2 magenta/yellow, 2 light cyan/light magenta, 2 white, 1 HP Latex Optimizer, 1 HP Overcoat)

Long-term print-to-print repeatability	95% of colors ≤ 1.5 dE2000 ²
--	---

Media

Handling	Roll feed, take-up reel, wiper roller ³ , automatic horizontal cutter (for vinyl, banner and canvas ⁴ , paper-based media, and film)
Media types	Banners, self-adhesive vinyls, films, fabrics, papers, wall coverings, canvas, synthetics, mesh, textiles ⁵
Roll size	10 to 64-in rolls (23 to 64-in rolls with full support)
Roll weight	121 lb
Roll diameter	9.8 in
Thickness	Up to 19.7 mil

Applications	Banners; Displays; Exhibition and event graphics; Exterior signage; Indoor posters; Interior decoration; Light boxes - film; Light boxes - paper; Murals; POP/POS; Posters; Textile; Vehicle graphics; Window graphics; Stickers
--------------	--

Connectivity

Interfaces	Gigabit Ethernet (1000Base-T)
------------	-------------------------------

Dimensions (w x d x h)

Printer	101.7 x 34.1 x 55.2 in
Shipping	108.4 x 43.3 x 65.6 in
Operating area	110 x 82.7 in

Weight

Printer	661 lb
Shipping	963.4 lb

What's in the box	HP Latex 800 W Printer, printheads, maintenance cartridge, printer stand, take-up reel, user maintenance kit, edge holders, quick reference guide, setup poster, documentation software, power cords, air purgers, 2-in spindle adaptor
-------------------	---

Environmental ranges

Operating temperature	59 to 86°F
Operating humidity	20 to 80% RH (non-condensing)

Acoustics

Sound pressure	60 dB(A) (operating), 38 dB(A) (idle), <20 dB(A) (sleep)
Sound power	7.8 B(A) (operating), 5.5 B(A) (idle), <3.5 B(A) (sleep)

Power

Consumption	1.8-2.8 kW (5 kW peak) (printing), 105 W (ready)
Requirements	Input voltage (auto ranging) 200-240 V two wires and PE; 50/60 Hz (±3 Hz); two power cords; 16 A max per power cord

Certification

Safety	IEC 60950-1+A1+A2 compliant; IEC 62368-1 compliant; USA and Canada (CSA listed); EU (LVD, EN 60950-1 and EN 62368-1 compliant); Russia, Belarus, and Kazakhstan (EAC); China (CCC)
Electromagnetic	Compliant with Class A requirements, including: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia and New Zealand (RCM), Japan (VCCI), Korea (KCC), China (CCC)
Environmental	ENERGY STAR®; RoHS (WEEE, EU, EAEU, China, Korea, India, Ukraine, Turkey); REACH; EPEAT Silver; OSHA; CE marking compliant; Meets AgBB criteria; French VOC A+; Greenguard Gold; UL Ecologo; ZDHC - Level 1

Warranty	One-year limited hardware warranty
----------	------------------------------------



Ordering information

Product

3XD61A	HP Latex 800 W Printer
--------	------------------------

Accessories

21V10A	HP Latex 700/800 User Maintenance Kit
7HR16A	HP Latex 700/800 Textile Kit Accessory
7HR18A	HP Latex 700/800 Ink Collector Foams Kit
7HR19A	HP Latex 700/800 Media Loading Accessory
T7U73A	HP Latex 500/700/800 Wiper Roller

Original HP printing supplies

4UU93A	HP 836 White Latex Printhead
4UU94A	HP 836 Optimizer Latex Printhead
4UU96A	HP 836 Latex Maintenance Cartridge
4UV62A	HP 873 3-liter White Latex Ink Cartridge
4UV84A	HP 873 3-liter Black Latex Ink Cartridge
4UV85A	HP 873 3-liter Cyan Latex Ink Cartridge
4UV86A	HP 873 3-liter Magenta Latex Ink Cartridge
4UV87A	HP 873 3-liter Yellow Latex Ink Cartridge
4UV88A	HP 873 3-liter Light Cyan Latex Ink Cartridge
4UV89A	HP 873 3-liter Light Magenta Latex Ink Cartridge
4UV90A	HP 873 3-liter Optimizer Latex Ink Cartridge
4UV91A	HP 873 3-liter Overcoat Latex Ink Cartridge
4UV95A	HP 836 Black/Cyan Latex Printhead
4UV96A	HP 836 Magenta/Yellow Latex Printhead
4UV97A	HP 836 Light Cyan/Light Magenta Latex Printhead
4UV98A	HP 836 Overcoat Latex Printhead

Original HP large format printing materials

HP PVC-free Wallpaper (UL GREENGUARD GOLD Certified ⁶ , FSC® certified ⁷ , meets AgBB criteria ⁸)
HP Photo-realistic Poster Paper
HP Premium Satin Canvas
HP Prime Matte Air GP (REACH compliant ⁹)
HP Premium Removable Gloss Adhesive Vinyl (REACH compliant ⁹)

For the entire HP Large Format Printing Materials portfolio, please see HPLFMedia.com.

Service and Support

U13DDE HP 2 year Next Business Day with Defective Media Retention
U13DJE HP 3 year Next Business Day with Defective Media Retention
U13DNE HP 1 year Post Warranty Next Business Day with Defective Media Retention
U13DTPPE HP 2 year Post Warranty Next Business Day with Defective Media Retention

ECO highlights

- Inks do not use reactive monomer chemistry, are ozone-free, and meet the ZDHC standard¹
- Can win new business with odorless prints, UL ECOLOGO®/UL GREENGUARD Gold Certified ink, and more²
- High-volume 3-liter HP Eco-Carton ink cartridges—carton-based design significantly reduces plastic

Please recycle printing hardware and eligible printing supplies and prints. Find out how at our website: <http://www.hp.com/ecosolutions>

¹ See <http://www.roadmaptozero.com>. Printing with HP Latex Inks avoids the problematic reactive monomers associated with UV printing. Acrylate monomers present in uncured UV inks and UV-gel inks can damage skin.
² There is a broad set of media with very different odor profiles. Some of the media can affect the odor performance of the final print. For certifications, see <http://www.ul.com/EL> and <http://www.ul.com/gg>.

¹ Print speeds may vary due to the adaptive printing mechanism to avoid image quality defects.
² The color variation between printed jobs has been measured at 12 pass mode on vinyl media following best practices for tiling layouts and within this limit: 95th percentile of pairwise color differences (95% of colors) ≤ 1 dE2000. Reflective measurements on a 943 color target under CIE standard illuminant D50, and according to the standard CIEDE2000 as per CIE Draft Standard DS 014-6/E:2012. 5% of colors may experience variations above 1 dE2000. Backlit substrates measured in transmission mode may yield different results.
³ Wiper roller is an optional accessory.
⁴ Automatic horizontal cutter is for use with thinner banners and canvas only. It is recommended to perform a test.
⁵ Textile Kit Accessory required for long runs of textile and porous textile.
⁶ UL GREENGUARD GOLD Certification to UL 2818 demonstrates that products are certified to UL's GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information visit <http://www.ul.com/gg> or <http://www.green-guard.org>.
⁷ Trademark license code FSC-C115319.
⁸ With HP Latex Inks, prints meet AgBB criteria for health-related evaluation of VOC emissions. See <http://umweltbundesamt.de/en/topics/health/commissions-working-groups/committee-for-health-related-evaluation-of-building>.
⁹ This product does not contain substances listed as SVHC (155) per Annex XIV of the EU REACH directive published as of June 16, 2014 in concentrations exceeding 0.1%. To determine the status of SVHC in HP products, see the HP REACH Declaration published at HP Printing Products and Consumable Supplies.

